


# First aid for problems with motor frame x82-FM



valid for frames with the remote control shown (from year of manufacture 2026)

## Lattoflex x82-FM 2 motors

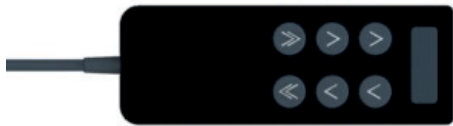

9 Buttons

Frame does not react	
Cause	Remedy
Mains plug disconnected/ mains lead interrupted.	Connect mains plug / check plug connections on the mains adapter.
Socket without power.	Check house fuse.
Radio remote control: no longer programmed.	Re-learn, see below.
Cable remote control: cable connection interrupted.	Check plug socket and cable.
Control does not react	
Cause	Remedy
Batteries flat, cable without contact.	Change batteries, 2x AAA or check cable connection.
Batteries incorrectly inserted.	Remove batteries, insert correctly. Check + and -. See marking in housing.
Remote control deactivated.	Reset to factory settings; see the back.
Remote control defective.	Replace the remote control.
Back or foot adjustment failed	
Cause	Remedy
No adjustment, despite motor noise.	The cable pull is probably defective, please contact the Lattoflex office!
Drive unit is overheated due to continuous operation.	Leave to cool for approx. 10 minutes.

### Manual remote control teach-in after initial commissioning


1. Remove the batteries and reinsert them, or replace them with new ones. The backlight is flashing.
2. Press any button, the status LED and the backligh will now flash alternately.
3. Press the teach-in button **L** on the radio reciever **a** within 30 seconds. To confirm that the process has been successful, the head drive will move briefly.
4. The status LED goes out, the backlight lights up constantly. The teach-in process is now complete and the remote control has been taught to this motor frame.



If the pairing process was unsuccessful and no controller was found, repeat the process from step 1.

## Emergency lowering with radio remote control

If the remote control is faulty or cannot be found, you can move the motor frame to the zero position by pressing and holding the button **N** on the radio receiver.

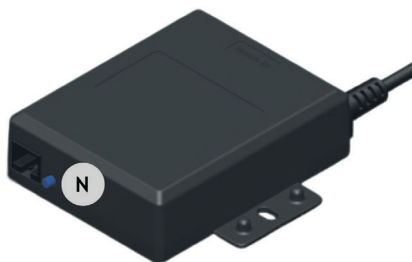


## Mechanical emergency lowering

In the event of a power failure, the back and foot sections can be lowered manually. The so-called mechanical emergency lowering is a device for all conceivable cases and an option that is always available for lowering the drive system. The so-called mechanical emergency lowering is a device for all conceivable cases and an option that is always available for lowering the drive system.

This is independent of other power sources such as batteries and can also be used in the event of a mechanical fault due to overload.

Important: Remove the mattress. If possible, carry out this process with the help of a second person.

- Raise the back or foot section manually
- Unhook the cable pull on both sides

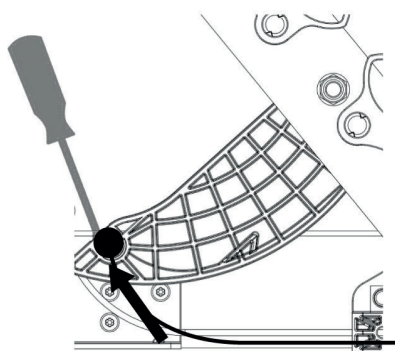

- Move the back or foot section to the zero position

Before recommissioning, ensure that all cable pulls are fixed in their intended position to avoid any risk of damage to the drive.

## Reset to factory settings

### Resetting the remote control:

- Press buttons 1,3,5 at the same time; the status LED will flash.
- If the status LED is lit continuously, release the buttons.
- The radio remote control has been reset. The backlight is flashing; please pair it again now.



### Resetting the radio receiver:

- Press the button **L** on the radio receiver for approx. 10 seconds.
- The leg motor moves briefly to confirm.
- The radio receiver has been reset to its factory settings.



**PLEASE NOTE:** After resetting to factory settings, all previously programmed components will be deleted and must be reprogrammed!